


**WARNING**  
**THIS IS NOT**  
**A PEELABLE COATING**

# Technical --- Data Sheet

## Protectapeel Asbestos Encap



Apply At 250 Microns

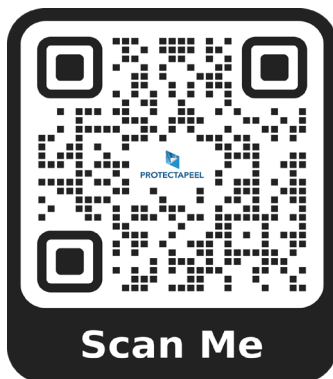


PLEASE SCAN FOR CORRECT APPLICATION

## PRODUCT DESCRIPTION

Protectapeel Asbestos Encap is a water based VOC free protective coating. Applied quickly by spray, it forms a tough, durable barrier for the encapsulation of asbestos surfaces.

## PRODUCT ADHESION

Protectapeel Asbestos Encap dries to form a tough, air tight bond that does not loose adhesion.

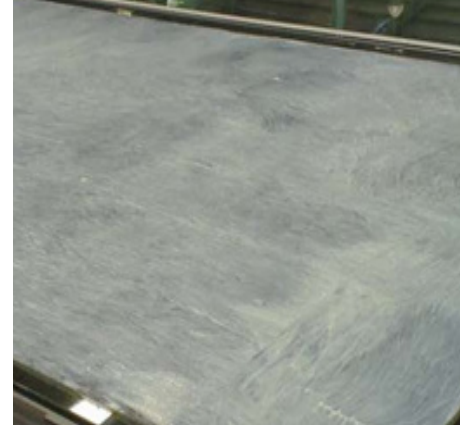

## PPE

We recommend the following PPE when applying Protectapeel Asbestos Encap



## PACKAGING SPECIFICATION

Protectapeel Asbestos Encap is sold as standard in 15 kilo containers, theoretically covering 5m<sup>2</sup> per kilo, at a wet film thickness of 250 microns.

A standard pallet of Protectapeel Asbestos Encap is 44 x 15 kilo containers.

Sizes Available: 15kg, 200kg, 1000kg IBC



**FAST APPLICATION**

**DURABLE PROTECTION**

## APPLICATION TIME

Protectapeel is easily and quickly applied to flat, shaped and curved surfaces, covering approximately 3m<sup>2</sup> per minute using a Graco 390 airless spray gun.

## STORAGE

Store at temperatures between 5°C - 25°C. DO NOT ALLOW PRODUCT TO FREEZE

## SHELF LIFE

Shelf life is 24 months.

## PRODUCT SPECIFICATIONS

Protectapeel Asbestos Encap is clear as standard but is also available in white.

**Tensile Strength: >5 MPa**

**Elongation: >1000%**

**Adhesion: < 2.5 MPa**

**Viscosity: 3,000 ± 250 cP @ 20°C**

**Flash Point: N/A**

**Density: 1.09 kg l<sup>-1</sup>**

**Solids Content: 41 ± 2 %**

**pH: 7-8**

**Maximum VOC: 0 g l<sup>-1</sup>**

## FLAMMABILITY

Protectapeel Asbestos Encap is non-toxic and non-flammable in the wet state. The dry film waste may be disposed of as low hazard. Refer to the Safety Data Sheet (SDS).

## APPLICATION

Protectapeel is applied using an airless spray gun (such as a Graco 390) using a 17 thou tip size. ALWAYS STIR THE PRODUCT BEFORE USE.

When you're ready, start by spraying Protectapeel Asbestos Encap in a horizontal motion, keeping your wrist straight and releasing the trigger at the end of each pass. Once you've finished horizontally, switch to a vertical spray to create a nice even "box coat" effect. Keep a steady, consistent speed as you go for the best finish.



## CURING TIME

A WFT of 250 Microns will be tack free in approximately 170 minutes at room temperature. Force drying may be used by using moving air and increasing the surface temperature to a maximum of 50°C.



## CLEANING INSTRUCTIONS

Clean equipment with water immediately after use.



**FAST APPLICATION**

**DURABLE PROTECTION**



# Do's & Don'ts

- ✓ Use correct PPE
- ✓ Mix before use
- ✓ Use the correct tip size
- ✓ Store in a cool/dry place
- ✓ Use wet film gauge to measure - 250 Microns
- ✓ Mask all areas you do not want protected
- ✓ Always seal the tub when not in use
- ✗ Do not allow product to freeze
- ✗ Do not apply in rainfall
- ✗ Do not consume or get in eyes
- ✗ Do not mix with other products

**FAST APPLICATION**

**EASY REMOVAL**

More Information —  
**Get In Touch**



[ENQUIRIES@SPRAYLAT.CO.UK](mailto:ENQUIRIES@SPRAYLAT.CO.UK)

+44(0)1536 408 409

[WWW.PROTECTAPEEL.COM](http://WWW.PROTECTAPEEL.COM)